Prior to carrying out any installation you should refer to our website in order to confirm that this guide is current and still applicable






### SAFE HANDLING PROCEDURE

Wherever possible, manual handling of the product should be avoided by the use of mechanical lifting equipment.

It is essential that every load is assessed prior to lifting to reduce the risk of injury.

All manual handling should be carried out in accordance with The Manual Handling Operations Regulations 1992 and later amendments.


## COMPONENTS



# THE INSTALLATION PROCESS



Place first barrier at starting point of intended line of installation.

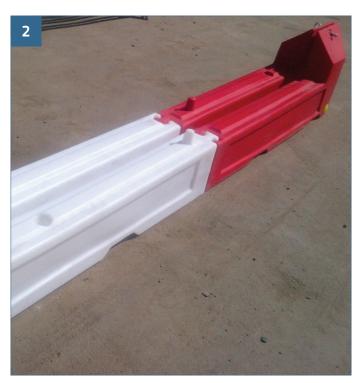

Link the next barrier in place using the jigsaw connections.




Remove nut and bolt and insert the mesh panel as shown.



Replace nut and bolt and tighten to secure mesh panel (13NM).



Remove white caps and fill both barriers with water (ensure all white caps are replaced when full).

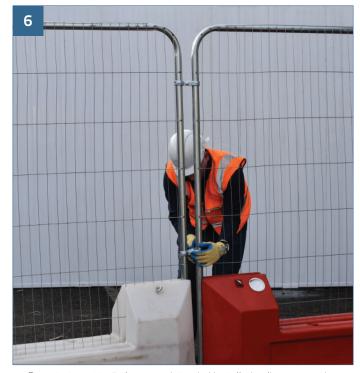

Repeat steps 1 to 5 along your intended installation line, connecting panels with couplers as shown and tighten (13NM).

## Important Notice

It is the client's responsibility to ensure that the installation is fully checked on a regular basis, particularly after high winds or severe weather conditions, paying particular attention to the security of fixings used within the installation.

0870 950 57 88

Email us at sales@bloknmesh.com or visit our website www.bloknmesh.com

### Disclaimer

Blok 'N' Mesh Global Ltd and Blok 'N' Mesh Europe Ltd are not liable for any 3rd party installations. This installation guide is a guide only. Blok 'N' Mesh Global Ltd and Blok 'N' Mesh Europe Ltd strongly recommends that a full risk assessment and method statement should be carried out prior to installation.

Blok N Mesh is a member of the Crownlea Group of Companies. Registered Office: Leytonstone House, Leytonstone, London E11 1GA. Co. Reg. No. Blok 'N' Mesh Global Ltd (12462123) and Blok 'N' Mesh Europe Ltd (12462239).

